


ELECTRIC CHAIN HOIST C/W ELECTRIC TROLLEY

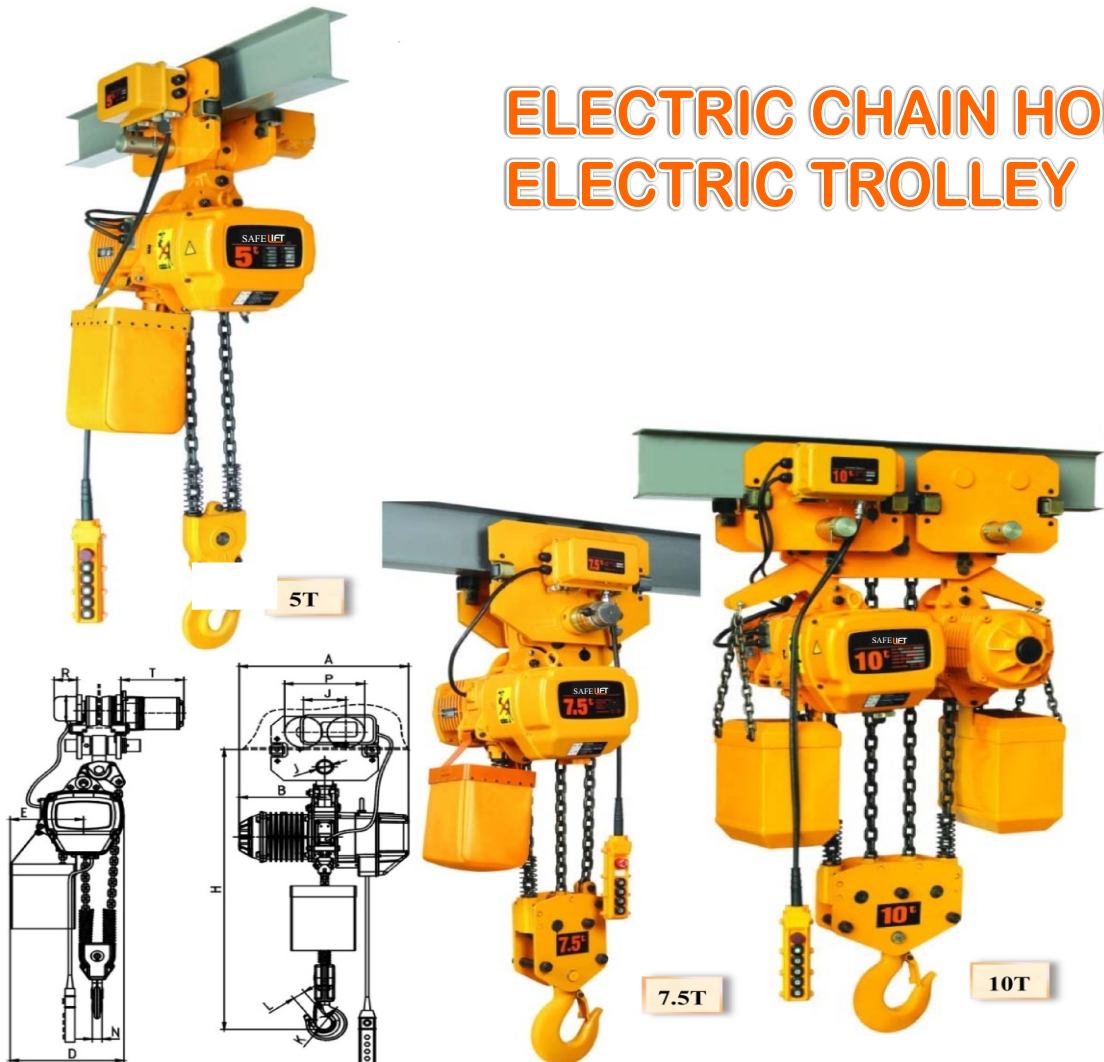

		SL05-01T	SL01-01T	SL02-01T	SL03-01T	SL05-02T	SL10-04T
Capacity (t)		0.5	1	2	3	5	10
Standard lift (m)		3	3	3	3	3	3
Lifting speed (m/min)		7.8	6.8	6.8	5.6	2.8	2.8
Travelling speed (m/min)		12.2	10/20	10/20	10/20	10/20	10
I-beam width (mm)		58-130	80-160	82-178	100-180	110-180	150-202
Load chain (mm)		Ø 6.3	Ø 7.1	Ø 10.0	Ø 11.2	Ø 11.2	Ø 11.2
No. of load chain falls		1	1	1	1	2	4
Motor power (kw)		0.75	1.5	3	3	3	3.0 x 2
Power Supply		220-440V, 50.60Hz, 3 PHASE					
Dimension (mm)	A	460	520	620	620	620	630
	B	230	260	310	310	310	315
	D	280	300	430	430	430	890
	E	160	176	265	265	325	430
	H	550	600	800	845	1030	1400
	I	Ø32	Ø40	Ø49	Ø59	Ø60	Ø90
	J	Ø25	Ø31	Ø35	Ø42	Ø45	Ø70
	K	Ø32	Ø40	Ø49	Ø49	Ø60	Ø90
	L	25	31	35	42	45	65
M	17	24	30	35	43	107	
N	17	24	30	35	43	50	