


## CHAIN BLOCK



### Characteristics:-

- Capacity ranges from 0.5t to 20t.
- Automatic double pawl braking system.
- Double cover protection.
- Light weight robust construction.
- Low effort to lift maximum load.
- Extra thick asbestos free friction discs.
- Fully forged hooks are fitted with safety latches as standard.
- High grade alloy load chain.
- Zinc plated hand chain as standard.
- Unique hand wheel cover for guiding hand chain.
- Each hoist is proof tested as 1.5 times of WLL up to 10t, 1.25 times of WLL 15t - 20t.
- Complies with EC Council Directives 2006/42/EC Machinery.
- G-80 load chain equipped with all chain blocks.

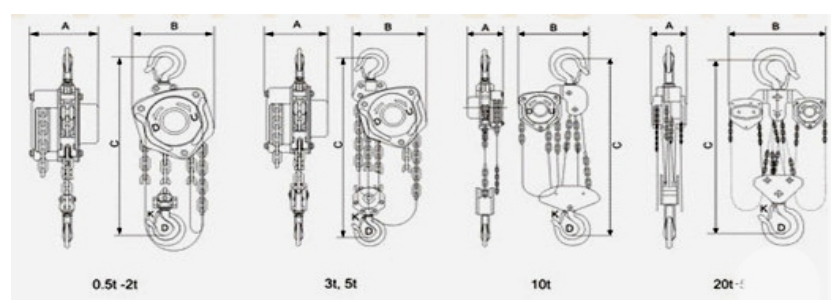

### Main Performance and Technical Specifications

Capacity		0.5	1	1.5	2	3	5	10	20
Standard Lift		2.5	2.5	2.5	3	3	3	3	3
Proof Load		7.35	14.7	22.1	29.4	44.1	73.5	147	245
Effort Required to lift Rated Load		200	320	360	365	385	435	435	435X2
No. Of Falls of Load Chain		1	1	1	1	2	2	4	8
Load Chain		6X18	6X18	8X24	8X24	8X24	10X30	10X30	10X30
DIMENSIONS (MM)	A	137.5	146.5	170	170	170	190	190	209
	B	137	162	183	194	220	288	384	625
	C	270	317	399	414	465	618	798	890
	D	35	35.5	45	42.5	50	64	85	110
	K	28	26	32.5	32	37	46	50	81
Net Weight	Kg	8.4	10.5	15.5	18.5	21.2	41.8	81.7	173
Extra weight per Metre of Extra Lift	Kg	1.7	1.7	2.3	2.3	3.7	5.6	9.7	19.4