
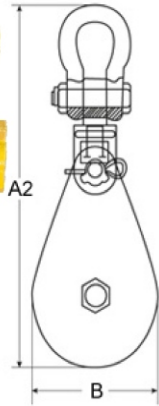


## Heavy-Duty Snatch Block with Shackle (single-sheave)

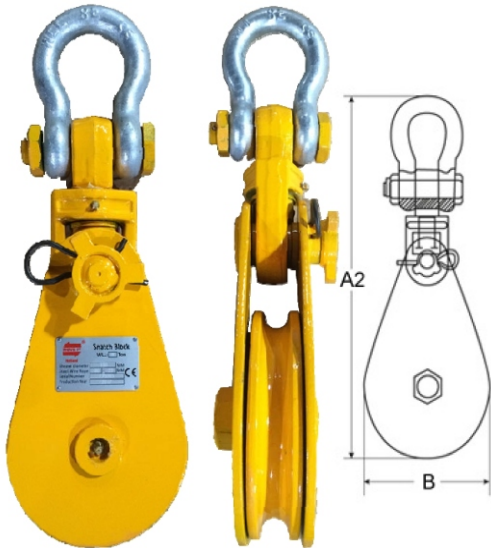

### Feature

- » Solid all-steel construction, heavy-duty type design.
- » Easy opening mechanism ensures a fast change of wire rope while block is suspended.
- » Fully machined sheave.
- » Sheave has a sealed ball bearing system, fully lubricated for maintenance-free operation.
- » Forged steel eye is designed to avoid twisting of unit during operation.
- » Fitted with grease nipples for ease of maintenance
- » Special design of side plates restricts rope from jamming.
- » Move It snatch blocks are operationally tested to 2 times of the Working Load Limit(WLL) and come with an individual test certificate.
- » Each unit is supplied complete with high strength safety bow shackle to Europan standard.
- » All Move It snatch blocks have an individual serial number stamped on the identification plate.
- » As per the latest Machinery Directive and EN safety standards.

Model	WLL (ton)	Sheave Q'ty (pcs)	Sheave Diameter (mm)	A2 (mm)	B (mm)	C (mm)	for Wire Diameter (mm)	Net Weight (kg)
MT-3"x1	2	1	75	286	82	70	7-9	3.8
MT-4 1/2"x1	4	1	115	345	120	70	10-12	6.2
MT-6"x1	4	1	150	399	160	70	16-18	8.3
MT-6"x1	8	1	150	475	160	93	20-22	14.1
MT-8"x1	8	1	200	528	210	93	20-22	18.7
MT-8"x1	15	1	200	663	210	102	22-24	33
MT-10"x1	10	1	250	679	260	115	24-26	34.7
MT-10"x1	12	1	250	679	260	115	24-26	34.7
MT-12"x1	12	1	300	767	310	133	24-26	54
MT-12"x1	15	1	300	788	310	133	26-28	55
MT-14"x1	22	1	355	952	365	140	28-32	109
MT-16"x1	22	1	400	1019	415	140	28-32	118
MT-16"x1	30	1	400	1126	415	155	32-35	164
MT-20"x1	30	1	500	1256	514	162	32-35	208
MT-24"x1	50	1	600	1525	625	240	46-50	418

## Snatch Block with Hook (single-sheave)



### Features

- » Durable powder coat finish.
- » Hook type is fitted with safety latch.
- » Fully machined sheave.
- » Heavy-duty permits to perform under extre condition.
- » Forged spare parts enhance the quality.
- » 2~10 sheaves for bigger capacity available(max. up to 320ton).

Model	WLL (ton)	Sheave Q'ty (pcs)	Sheave Diameter (mm)	for Wire Diameter (mm)
MT-1H	1	1	106	7.7-11
MT-2H	2	1	142	11-14
MT-3.2H	3.2	1	166	12.5-15.5
MT-5H	5	1	202	15.5-18.5
MT-8H	8	1	264	20-23
MT-10H	10	1	300	23-24.5
MT-16H	16	1	390	28-31
MT-20H	20	1	436	31-35