


# Universal Spill Absorbents Granules

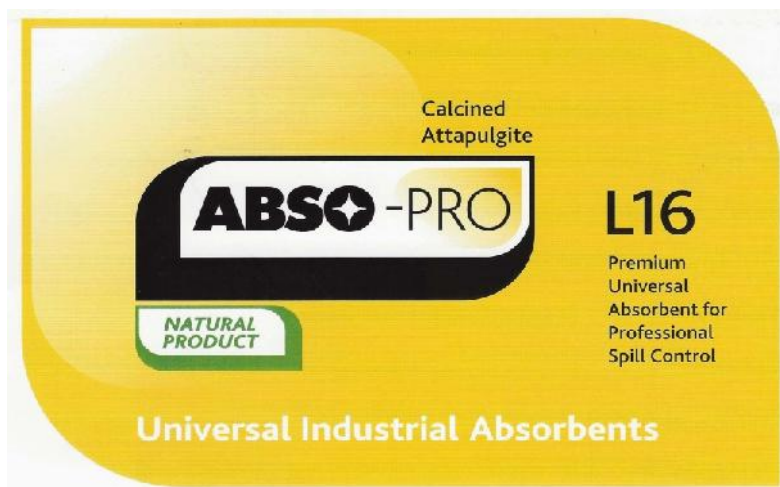

## ABSO-PRO® L16

Calced Attapulgit LVM 16/60

### General description

A premium, all-purpose absorbent with hard, non-slaking granules, made from calcined attapulgit clay.

### Functional use

Dust-free, slip-resistant and non-flammable qualities suit intensive applications for routine or emergency use in the workplace.

### General characteristics

- Inert Mineral Absorbent
- Non-Combustible, Non-Flammable
- Lightweight
- Free Flowing
- High Surface Area
- High Oil Absorption
- High Water Absorption
- Hard, Moisture Resistant Granules
- Non-Swelling
- Low Dust Content

### Technical data

Material Type: Calcined Attapulgit

Appearance: Beige Granules

	TYPICAL	SPECIFICATION
Moisture Content (105° C)*, %:	2	4 max
Water Absorption (Westinghouse Method), %:	135	
Oil Absorption (Westinghouse Method), %:	100	
Granulometry: 16/60 (0.250 – 1.18 mm)		
Sieve Analysis:		
Percent Plus 16 Mesh (+ 1.18 mm):	3	8 max
Percent Minus 60 Mesh (- 0.250 mm):	3	8 max
Apparent Bulk Density, g/cm <sup>3</sup> :	0.57	
pH (5% Suspension):	8	